



WaterLink® **SpinTouch** CW

The Ultimate  
Automated Water  
Analyzer



 LaMotte

For Testing *Cooling Water*

*9 Tests in 60 Seconds! Ready to go anywhere!*

# WaterLink® SpinTouch® CW


“Every now and then a technology emerges that changes people’s lives. For people who test water, that time is now.”

— David LaMotte, President

The innovative **WaterLink® Spin Touch® CW** photometer does all your cooling water testing for you. Each sealed reagent disk contains the precise amount of reagent needed to run a complete series of tests. Just fill one unique Spin reagent disk with less than 3 mL of water and all your vital tests are done automatically—in just 1 minute! It’s the most advanced system for precise use of wet chemistry methods ever produced. Now analysts can achieve precision without time consuming test and clean-up procedures. This ground-breaking analysis system is so simple anyone can use it! No vials to fill, no prep time, no guessing!

**So Simple!**  
**So Fast!**  
**So Precise!**

- Reliable Results
- Super Fast & Simple
- Auto-Record Keeping
- Rugged and Portable




Fill the disk



Insert the disk



Tap “Start Test”

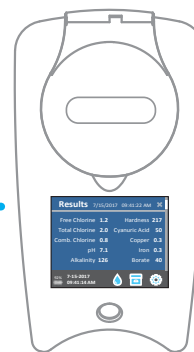

Results in 60 Seconds

## Available Tests

Total Alkalinity

Bromine

Free Chlorine

Total Chlorine

Combined Chlorine

Copper

Calcium Hardness

Total Hardness

Total Iron







**Centrifugal  
Fluidics  
Photometry™**

*“Proven analytical chemistry has combined with **Centrifugal Fluidics Photometry** to create the breakthrough **WaterLink® Spin Touch™**”*

### Reliable Results

- Virtually Eliminates User-Error
- Pre-Measured Reagents
- Exact Reaction Time and Auto-Blanking
- Meter Calibration Check System
- 6-Wavelength Photometer

Instrument Type:	Centrifugal Fluidics Photometer
6 Wavelengths:	390 nm, 428 nm, 470 nm, 525 nm, 568 nm, 635 nm
Display:	Color Capacitive Touchscreen, 3.5", 320 X 240 pixel resolution
Languages	English, French, Spanish, German, Italian, Portuguese, Dutch, Swedish
Batteries:	Lithium Ion, Rechargeable [Full Charge in 10 hours], 150 tests per charge
Communication:	Bluetooth, USB-C
Calibration:	Factory Set, Field Calibration via Internet Connection
Data Storage:	Last 250 Test Results with Date and Time
Water Resistance:	Rubber Co-molded Base, Rubber USB Port Plug, Gasketed Display & Hinge
Size & Weight:	8.5 L x 4.9 W x 4.1 H inches; 1.74 lb; 22.6 L x 12.7 W x 11.4 H cm; 0.79 kg
Operation:	Single On/Off/Reset Button with Indicator Light, Touchscreen
Firmware:	Internet Updateable [New Tests, New Test Calibrations, etc.]
Printer:	Optional Bluetooth® Printer [Code 5-0066]; 384 dots per line at 8 dots/mm resolution
Certification	CE

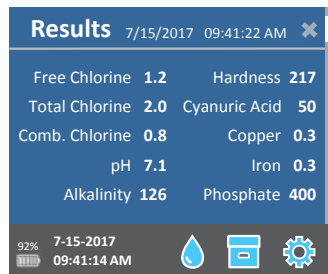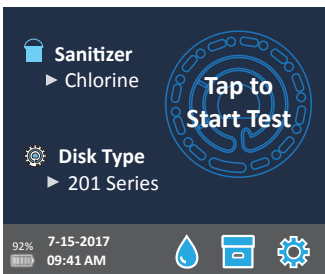

### Super Fast & Simple

- 1 Minute for 9 Complete Tests Using One Disk
- Fill Disk and Insert > Tap "Start Test" > Read Results

### Auto-Record Keeping

- Stores Test Dates, Times, Results

### Stand-Alone

- No Computer, Smartphone, or Tablet Needed
- Touchscreen Operation
- Communicate through Bluetooth® or USB

### Rugged and Portable

- Innovative Water-Resistant Housing
- Internal, Rechargeable Batteries

## WaterLink® Spin Touch® CW Code 3580-EU

Includes: Photometer, Instruction Manual, Quick-Start Instructions, 3 Syringes, Meter Check Disk, Disk Cover, Sample Bottle, USB Cable with AC Adapter, Carrying Case [Disks sold separately]




Bluetooth® is a registered trademark of Bluetooth® SIG, Inc.

## 9 Test Parameters Disks

Disks come individually packaged in foil pouches in boxed packs of 50.

60  
SECONDS

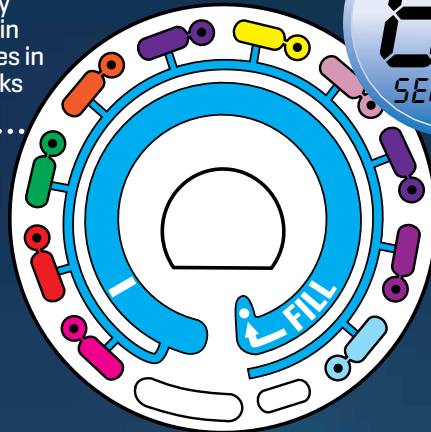

### WaterLink® Spin Disk Series CW801 Code 4339-H

Test Parameter	Range
Free Chlorine (DPD)	0-15 ppm
Total Chlorine (DPD)	0-15 ppm
Bromine (DPD)	0-33 ppm
Combined Chlorine	0-15 ppm
Calcium Hardness	0-800 ppm
Total Hardness	0-70 gpg 0-1200 ppm
Total Alkalinity	0-250 ppm
Copper	0-3.0 ppm
Iron, Total	0-6 ppm

Disk Patent No. 8,734,734

FCI Patent No. 8,987,000

TCI Patent No. 8,993,337

FCI EU Patent No. EP2784503 A1



**LaMotte** 100

YEARS 1919  
2019

### WaterLink® Spin Touch® DW Code 3586

802 Washington Ave · Chestertown · Maryland · 21620 · USA  
800-344-3100 or 410-778-3100 · lamotte.com

©2018 LaMotte Company · LaMotte WaterLink Spin Touch CW.indd · 10.15.18