

The Public Pool Monitoring Solution for Health Inspectors

Automated
water analysis
in only

60
SECONDS!

NSF[®]

Certified to
NSF/ANSI Standard 50



Simply Inject Sample
into Reagent Disk



Transfer Data
to Your Mobile
Device



Monitor All
Your Sites

The Challenge

- > Getting test results you can trust—fast!
- > Generating digital records on-site and at office instantly
- > Eliminating user-error common with drop test kits
- > Avoiding questions by pool owners or staff about test accuracy
- > Modernizing your inspection data systems

The Solution

WaterLink® SpinTouch®
with  **WaterLink Solutions™**


The new Gold Standard for health inspectors

The innovative **WaterLink® Spin Touch®** photometer handles all your pool and spa testing needs and records data each moment a test is done. Simply fill a multi-test reagent disk with your water sample, insert it in the meter and tap “start.” All your vital tests are done automatically, thus eliminating user-error.

Results are displayed on the touch-screen display, saved inside the meter, and easily transferred to software.



Scan to see video or go to
waterlinkspintouch.com/spin-touch.html



SAVE Time

10 Tests in 60 Seconds


3 Tests in 30 Seconds

Pre-filled Reagent Disk

No Drops to Count

No Training Needed

No Cleanup



SAVE Data

Save Results in the Device


Save Results to the Cloud

No Hand-Written Results

Review Test Data History

Email Reports

Accessible from PC or Mobile Devices



SAVE Problems

Eliminate Test Errors

Improve Test Reliability

No Guessing

No “Doctoring” Results

No Training Needed

Improve Bather Safety

The Device *Precise analysis of 10 parameters in 60 seconds!*



See Specifications on Back Page



| Results 1/15/2019 09:41:22 AM | | | |
|-------------------------------|-----|---------------|------|
| Free Chlorine | 1.2 | Hardness | 217 |
| Total Chlorine | 2.0 | Cyanuric Acid | 50 |
| Comb. Chlorine | 0.8 | Copper | 0.3 |
| pH | 7.1 | Iron | 0.3 |
| Alkalinity | 126 | Salt | 2000 |

Reliable Results

- Virtually Eliminates User-Error
- Meter Calibration Check System

Super Fast & Simple

- **30** Seconds for 3-Test Disk, **60** Seconds for 10-Test Disk
- Fill Disk and Insert > Tap "Start Test" > Read Results

Auto-Record Keeping

- Stores Test Dates, Times, Results, Location
- Upload Data to Cloud, Live or Later

Stand-Alone or Cloud Ready!

- No Computer, Smartphone, or Tablet Needed
- Or via Bluetooth® and USB Connect to a Mobile Device or Computer

Rugged and Portable

- Water-Resistant Housing,
- Waterproof Carrying Case
- Rechargeable Batteries
- 2-Year Warranty



Certified to
NSF/ANSI Standard 50

NSF CERTIFICATION meets MAHC Protocols

The NSF/ANSI 50 certification mark on a water quality testing device (WQTD) used in recreational waters, such as pools and spas, means that the product was reviewed and certified by NSF International to meet applicable American National Standards for product design and performance. NSF tests and re-tests products to confirm that they comply with all requirements of certification for performance, accuracy and operating range. Certification levels of L1, L2, and L3 are possible with L1 being the highest rating.

| Test Factor | Application | NSF Certified Range | NSF Level |
|--------------------|-------------|---------------------|------------------|
| | | | Accuracy/Overall |
| pH | Pool | 6.4-8.6 | L1 |
| | Spa/Hot Tub | 6.4-8.6 | L1 |
| Free Chlorine | Pool | 0-15 ppm | L1 |
| | Spa/Hot Tub | 0-7 ppm | L1 |
| Chlorine, Combined | Pool | 0-1 ppm | L1 |
| | Spa/Hot Tub | 0-1 ppm | L1 |
| Cyanuric Acid | Pool | 5-50 ppm | L1 |

Other test factors not evaluated by NSF. Go to www.nsf.org for a current listing of LaMotte NSF certified products.

The Complete Lab *Reagent cartridge disks sold separately*




Mobile WaterLink® Spin Touch®


Code 3581

- Photometer
- Instruction Manual & Quick-Start Guide
- 3 Syringes
- Meter Check Disk
- USB Cord with USB Wall Adapter
- Waterproof Carrying Case with Foam Insert

*So Simple!
So Fast!
So Precise!*

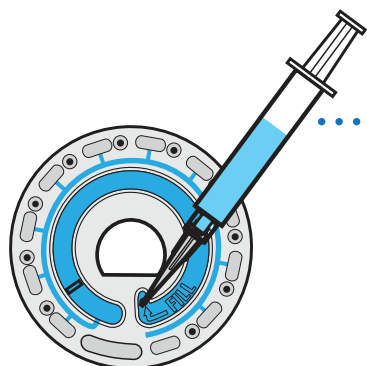


Fill
the disk

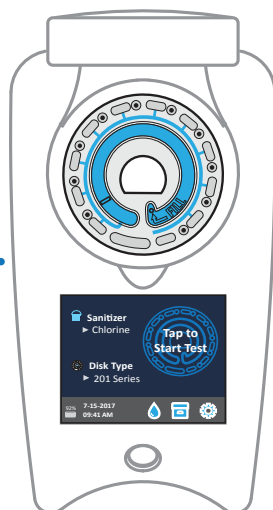

Insert
the disk



Tap
"Start Test"

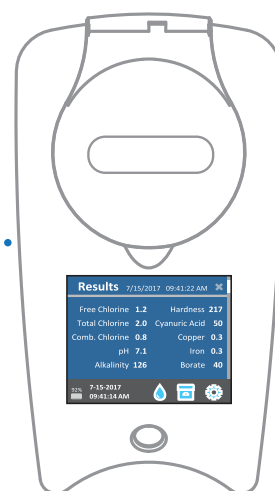

Results in 30
or 60 Seconds


The Reagent Cartridge Disks

10 Test Parameters Disks

Ideal for Service, In-Store, and Public Pool Testing

60
SECONDS

See Test Parameters
in Chart Below

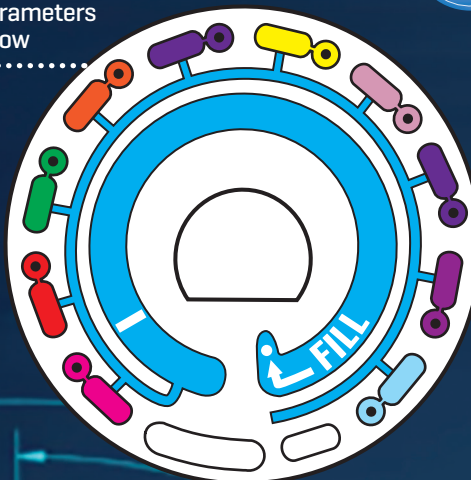


Test 3 Parameters, 3 Times!

Ideal for Public Pools testing throughout the day

30
SECONDS

See Test Parameters
in Chart Below

Combined
Chlorine is
calculated by
Spin Touch™

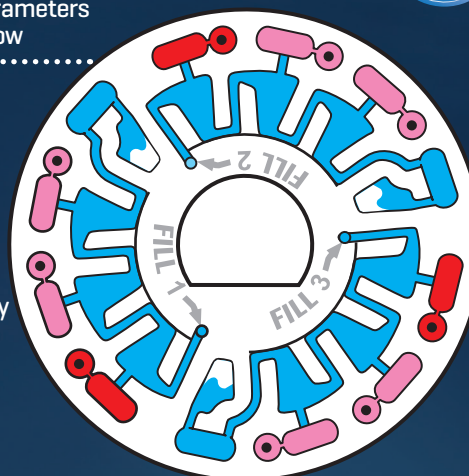

WaterLink® Spin Disk Series

| | Order Code | 4328-H | 4334-H | 4335-H |
|----------------------|---------------|--------|--------|--------|
| | Uses per Disk | Single | 3 | 3 |
| Test Parameter | Range | | | |
| Free Chlorine [DPD] | 0-15 ppm | ■ | ■ | ■ |
| Total Chlorine [DPD] | 0-15 ppm | ■ | ■ | |
| Bromine [DPD] | 0-33 ppm | ■ | ■ | ■ |
| pH | 6.4-8.6 | ■ | ■ | ■ |
| Calcium Hardness | 0-800 ppm | ■ | | |
| Total Alkalinity | 0-250 ppm | ■ | | ■ |
| Cyanuric Acid | 5-150 ppm | ■ | | |
| Copper | 0-3.0 ppm | ■ | | |
| Iron | 0-3.0 ppm | ■ | | |
| Salt | 0-5000 ppm | ■ | | |

Disk Patent No. 8,734,734
FCI Patent No. 8,987,000
TCI Patent No. 8,993,337
FCI EU Patent No. EP2784503 A1



RECYCLE YOUR DISKS!

Ship us your used disks—we'll grind and recycle them. For details, go to www.waterlinkspintouch.com/support



Certified to
NSF/ANSI Standard 50

The Software



*Takes world's best testing system to the next level!
...and is designed for public pool monitoring.*

- **Instantly capture date, time, test results** for every pool, spa, fountain, etc. for which you are responsible.
- **View in real time** from any internet connected device.
- **Complete water quality history** stored and graphically presented.
- **Monitoring Dashboard alerts you** to all water bodies out of range in real time.

All Free of Charge [except Monitoring Dashboard at nominal monthly charge].


Monitoring Dashboard

Watch all your bodies of water in real-time and see color alerted out-of-range problems instantly on a consolidated dashboard.

- Review test results at a glance, shaping charts and graphs to show information relevant to you.
- Define when a test factor result should indicate it is out of range or on target.
- Test Results entered manually are flagged with a special icon.
- Graphically trend test data to easily identify problem areas.

| Most Recently Tested Sites | | | | | | | | | | | |
|----------------------------|----------------|--------------|------|------|-----|-----|-----|------|-----|----|---|
| Date/Time | Site Name | Tested By | FCL | TCL | PH | ALK | HRD | SLT | PHO | FE | |
| 01/15/2019 2:10 pm | Town Pool | Jack Banks | 2.24 | 2.24 | 7.6 | 64 | 204 | 1325 | 0 | 0 | ▲ |
| 01/15/2019 2:08 pm | Hotel One Pool | Susan Wright | 2.24 | 6 | 7.6 | 78 | 204 | 1425 | 0 | 0 | |
| 01/10/2019 11:28 am | Hotel One Spa | Susan Wright | 0 | 2 | 7.7 | 85 | 204 | 1525 | 0 | 0 | |
| 01/08/2019 2:45 PM | Club 6 Pool | David Shores | 1.06 | 1.06 | 7.8 | 86 | 204 | 1600 | 0 | 0 | |
| 01/08/2019 2:34 pm | Club 6 Spa | David Shores | 1.12 | 1.12 | 7.8 | 85 | 204 | 1670 | 0 | 0 | |
| 01/08/2019 12:22 pm | Hotel One Ftn | Sam Jones | 1.12 | 1.12 | 7.8 | 87 | 204 | 1670 | 0 | 0 | |

Basic Pool Profile ▼ | 1 2 3 4 5 ... | Out of Range: ■ In Range: ■ On Target: ■ 1-6 of 137 items

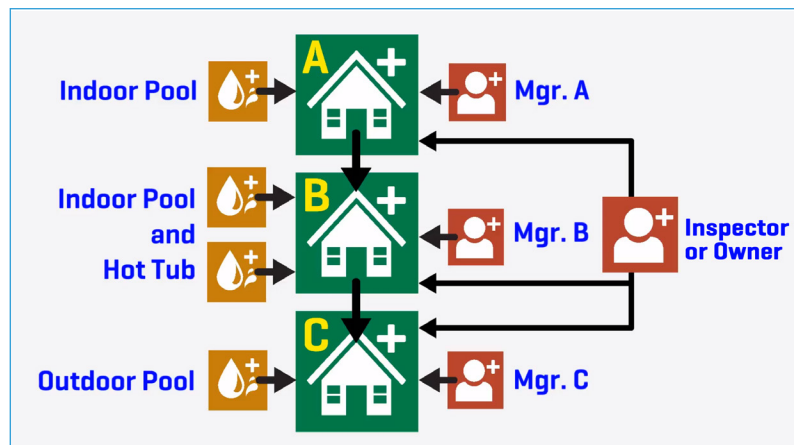

Flexible Data Management

Set up any relationships of Sites, Properties, and Contacts to fit your monitoring needs. Data is divided among three simple entities.



Sites are bodies or water you can test.



Properties are physical locations where a Site exists.



Contacts are individuals you'd like to contact when a water test is in question.

Accessible from PC or Mobile Devices

WaterLink Solutions is a web-based application, accessible from any internet connected device. WaterLink Solutions can be accessed via your web browser, or download the WaterLink Solutions mobile app for Android® or iOS® devices.



Integrated with the WaterLink® SpinTouch®

For Android and iOS devices running the WaterLink Solutions Mobile app, the WaterLink Spin Touch transfers results quickly and easily over Bluetooth®.

- Free to use!
- Optional add-ons expand the program's functionality

Free to Use

To learn more and sign up for a free account, visit www.softwarecenter.lamotte.com. There are several optional add-ons available for purchase to enhance your WaterLink Solutions experience, but LaMotte is proud to always offer the core of WaterLink Solutions for free.

Visit www.softwarecenter.lamotte.com to sign up for your FREE WaterLink Solutions account! Optional add-ons are available for purchase to enhance your WaterLink Solutions experience.

Is WaterLink® Solutions™ for you?

If you are responsible for any aquatic feature, ABSOLUTELY!

WaterLink® Solutions is designed for:

- Health Inspectors
- Public Pool Operators
- Water Parks
- Hotels and Resorts

With WaterLink® Solutions™ and the WaterLink® Spin Touch®, you have a complete solution to test, monitor, and analyze your data from anywhere at any time.



Certified to
NSF/ANSI Standard 50

SPECIFICATIONS

| | |
|----------------------|---|
| Instrument Type: | Centrifugal Fluidics Photometer |
| 6 Wavelengths: | 390 nm, 428 nm, 470 nm, 525 nm, 568 nm, 635 nm |
| Display: | Color Capacitive Touchscreen, 3.5", 320 X 240 pixel resolution |
| Languages: | English, French, Spanish, German, Italian, Portuguese, Dutch, Swedish, Turkish, Chinese |
| Batteries: | Lithium Ion, Rechargeable [Full Charge in 6 hours], 150 tests per charge |
| Communication: | Bluetooth, USB-C |
| Calibration: | Factory Set, Field Calibration via Internet Connection |
| Data Storage: | Last 250 Test Results with Date and Time |
| Water Resistance: | Rubber Over-molded Base, Rubber USB Port Plug, Gasketed Display and Hinge |
| Size & Weight: | 8.5 L x 4.9 W x 4.1 H inches; 1.74 lb; 22.6 L x 12.7 W x 11.4 H cm; 0.79 kg |
| Operation: | Single On/Off/Reset Button with Indicator Light, Touchscreen |
| Firmware: | Internet Updateable [New Tests, New Test Calibrations, etc.] |
| Software [optional]: | Android & iOS Apps, WaterLink Solutions |
| Printer: | Optional Bluetooth Printer [Code 5-0066]; 384 dots per line at 8 dots/mm resolution |
| Certification: | CE, Certified to NSF/ANSI Standard 50 |

WaterLink SpinTouch *The Future of Water Testing*

LaMotte Water Testing Leader Since 1919!

LaMotte Company • PO Box 329 • Chestertown • Maryland • 21620 • USA
800-344-3100 • scunningham@lamotte.com • waterlinkspintouch.com

